

## 180D 1500 V d.c. Flush end high speed fuse links



### Product description

Eaton's Bussmann series flush end mounted 180D 1500 V d.c. range of high-speed square body fuses are specifically designed to provide DC short circuit over current protection for a variety of applications including, DC to AC inverters used as part of Battery Energy storage systems (BESS), DC common bus systems, regenerative drives and rectifiers.

### Features

- 1500 V DC Voltage rating
- Low watts loss for energy efficiency
- Tested to 10 ms Time constant (suitable for most DC applications)
- Fast acting aR type protection
- Visual blown fuse indication as standard
- Optional microswitch indication available

### Applications

- DC to AC Inverter protection
- DC to DC Converters
- Battery storage applications
- Electric Vehicle charging stations
- Power conversion systems
- Regenerative drives
- DC Common bus system

**EATON**

Powering Business Worldwide

**Catalogue symbol**

- 180D7xxx

**Fuse body size**

- 4

**Technical data**

- Rated voltage: 1500 V d.c.
- Rated current: 800 A to 1800 A
- Class of operation: aR
- Breaking capacity: 100 kA
- Time constant: 10 ms

**Standards/Approvals**

- Designed and tested to IEC 60269 Part 4
- CE
- UL 248-13 Recognised
- RoHS compliant

**Packaging**

- 1


**Compatible microswitch**

- 170H0069


**Table 1. Technical data**

catalogue number 4BKN/155	Fuse link body size	Rated current (A)	Rated voltage (V d.c.)	Energy integrals I <sup>2</sup> t (A <sup>2</sup> s)		Minimum breaking current (A) 1500 V d.c.	Watts loss
				Pre-arcing at 1500 V d.c.	Clearing at 1500 V d.c.		I <sub>n</sub>
180D7462	4	800	1500	512,000	2,930,000	5500	111
180D7463	4	900	1500	776,000	4,440,000	6750	120
180D7620	4	1000	1500	1,000,000	5,720,000	7600	164
180D7698	4	1250	1500	1,400,000	8,000,000	9100	185
180D7627	4	1500	1500	2,500,000	14,290,000	12,000	228
180D7477	4	1800	1500	3,500,000	20,000,000	14,500	313


Dimensions - mm

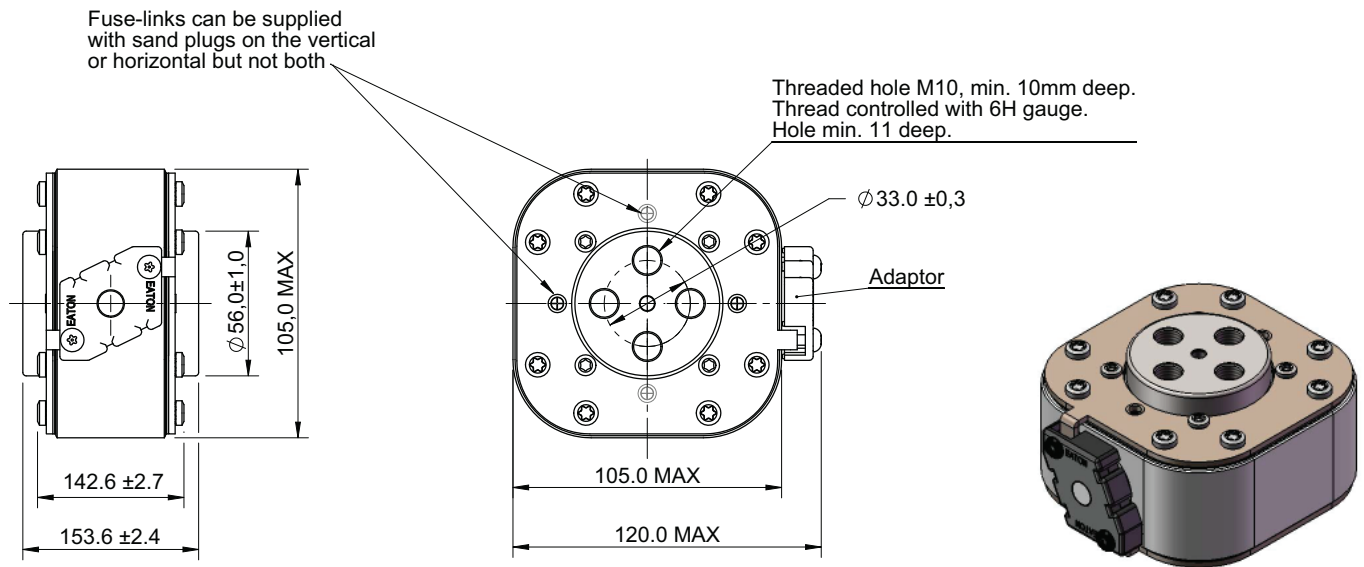

Cut-off curve

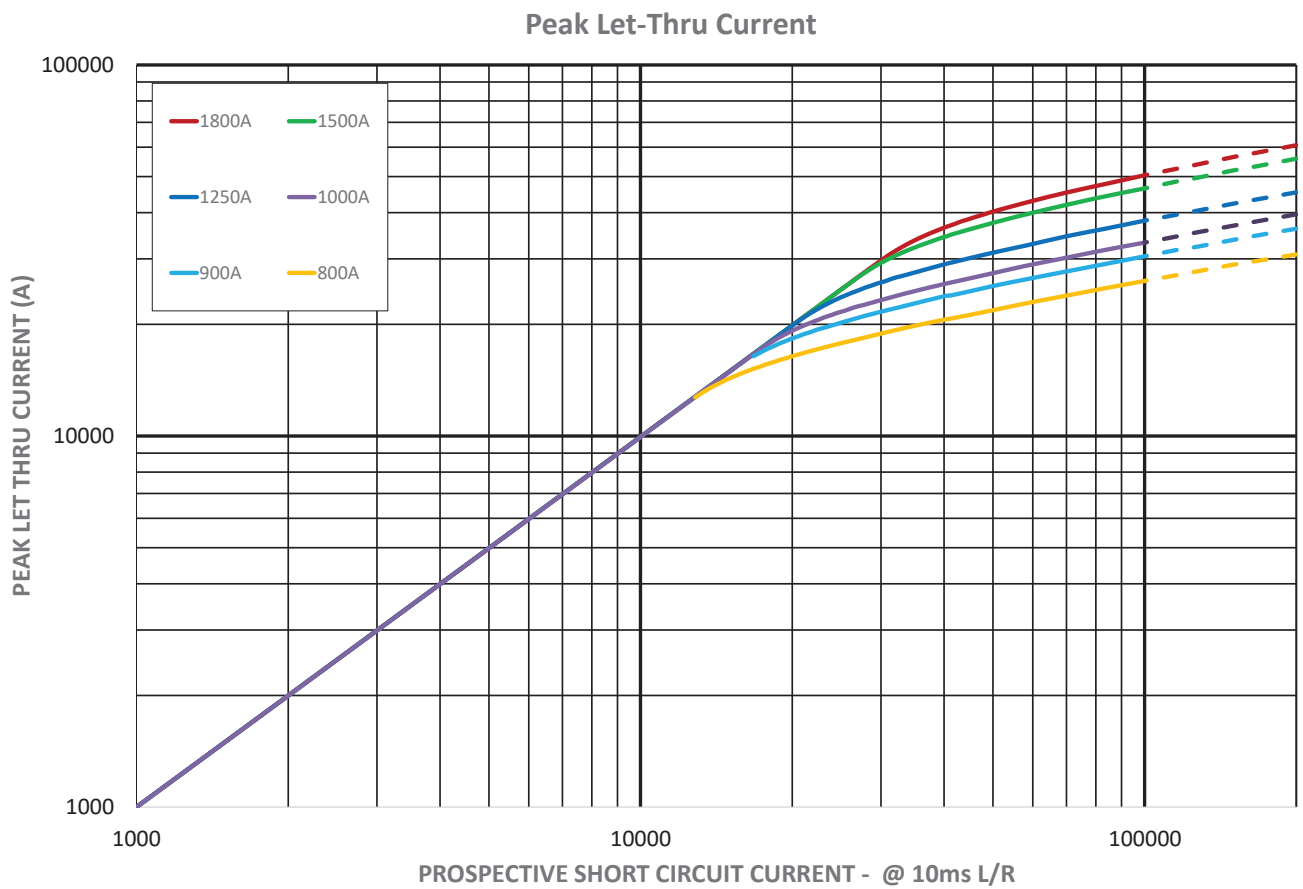

**Time current curve**

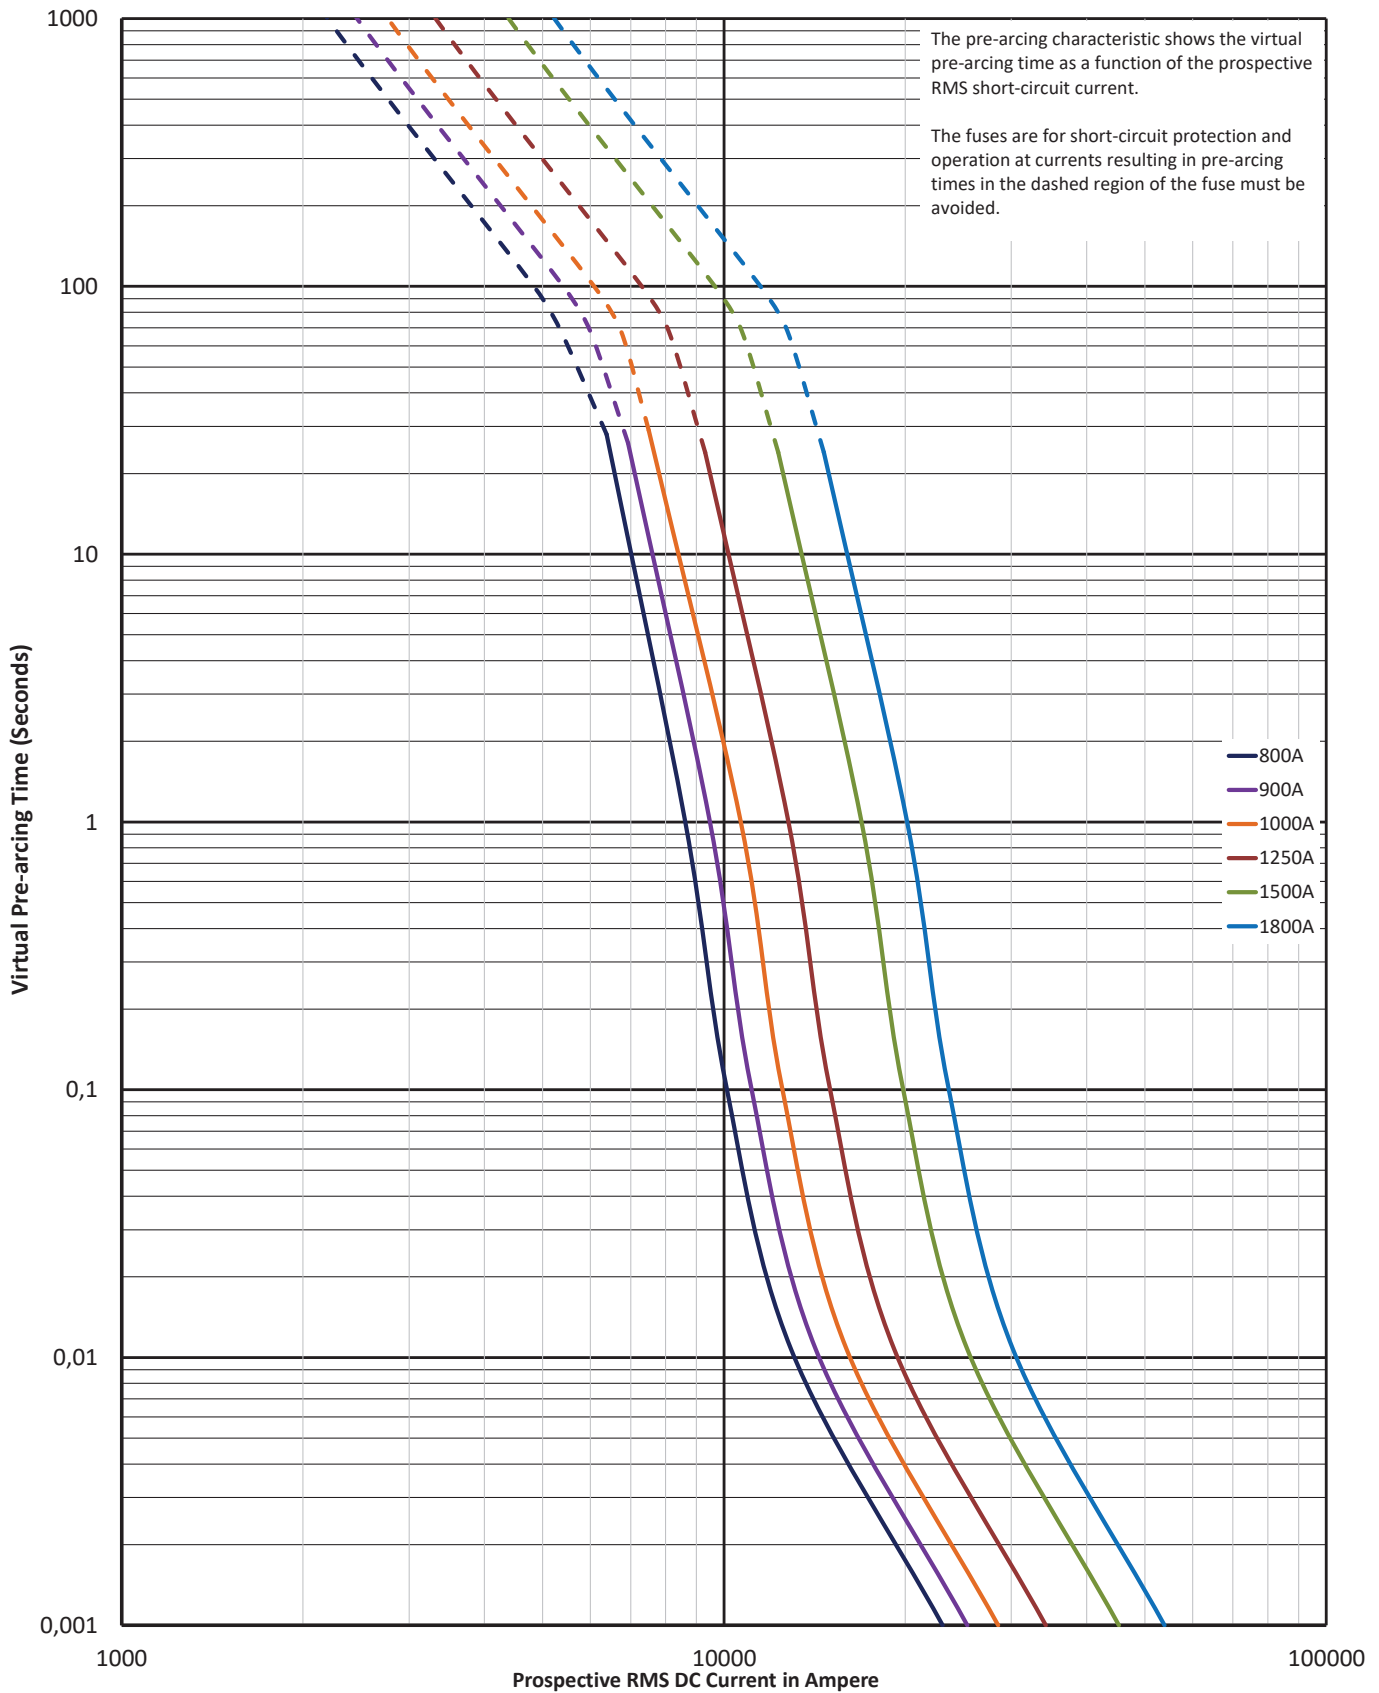



$K_b = 1 \quad N = 1,5$

**Total clearing curve**

The total clearing  $I^2t$  at rated voltage and tested DC time constant are given in electrical characteristics. For other voltages the clearing  $I^2t$  is found by multiplying by correction factor, K, given as a function of applied working voltages,  $E_g$ .

**Watts losses**

Watts loss at rated current is given in the electrical characteristics. The curve allows the calculation of the watts losses at load currents lower than the rated current. The correction factor,  $K_p$ , is given as a function of the RMS load current,  $I_b$ , in percent of the rated current.

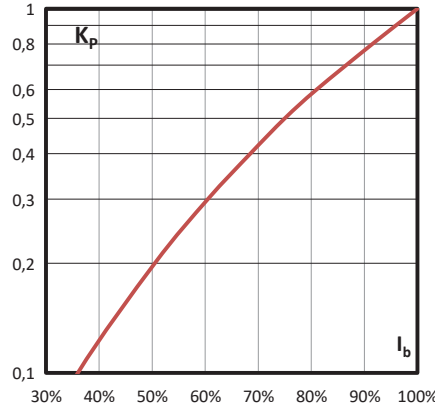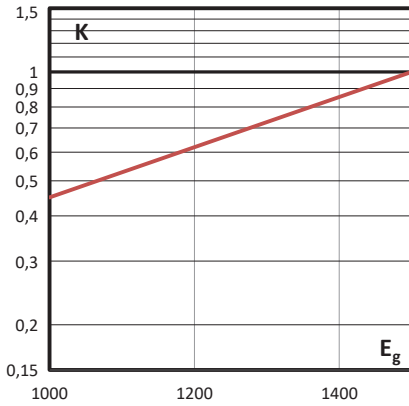

The only controlled copy of this data sheet is the electronic read-only version located on the Eaton network drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions. Only order confirmations and technical documentation by Eaton is binding. Photos and pictures also do not warrant a specific layout or functionality. Their use in whatever form is subject to prior approval by Eaton. The same applies to Trademarks (especially Eaton, Moeller, and Cutler-Hammer). The Terms and Conditions of Eaton apply, as referenced on Eaton Internet pages and Eaton order confirmations.

**Eaton**  
 EMEA Headquarters  
 Route de la Longeraie 7  
 1110 Morges, Switzerland

Eaton Electrical Products Limited  
 Unit 1, Hawker Business Park  
 Melton Road  
 Burton-on-the-Wolds  
 Leicestershire, LE12 5TH  
 United Kingdom

© 2021 Eaton  
 All Rights Reserved  
 PDF Only  
 Publication No. TD135006EN  
 February 2023



Eaton is a registered trademark.

All other trademarks are property of their respective owners.

