


The Eaton difference

- Standard size wallplates for precision cuts
- Mid-size screwless wallplates deliver the ultimate in designer looks with a screwless finish; they are fast and easy to install, virtually unbreakable and easy to clean
- Mid-size & oversize wallplates are designed for use in applications where additional wall coverage is needed
- Extra depth wallplates are available for use with old work outlet boxes for a flush fit to the wall
- Available wallplate materials include virtually unbreakable nylon & polycarbonate thermoplastics, 302/304 corrosion resistant stainless steel, brass, and thermoset
- Nylon & polycarbonate wallplates feature screw-catch, a timesaving feature that holds mounting screws captive to simplify installation
- Our wallplates are manufactured according to the performance & dimensional requirements of Federal Specification WP-455, NEMA Standard WD-1, UL Standard 514 and the NEC®
- Our multimedia wallplates make it easy to surround yourself with sound, simplify home theater connections and provide simple, clean ways to manage cable installations for home electronics.



Specific wallplate solutions for today's needs

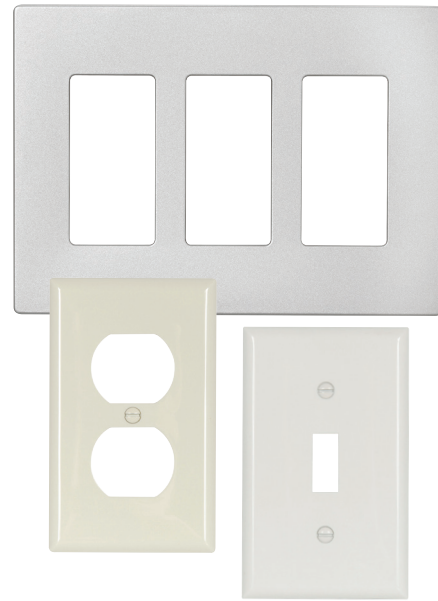

Aesthetic upgrade

Our screwless wallplates come in 3 different openings for upgrading the look of toggle switches, GFCIs, rotary dimmers and duplex receptacles without having to change out devices!

See pages P-16

Shown:
PJS1



Corrosion resistance

Brass and stainless steel wallplates offer durable, elegant corrosion resistance making them ideal for high-moisture locations like kitchens, baths, garages and basements.

See pages P-8

Shown:
93101



Impact resistance

Thermoplastic polycarbonate and nylon wallplates are virtually unbreakable, warp resistant, abrasion resistant and soil resistant, making them ideal for high-traffic areas.

See pages P-15

Shown:
PJ26





Thermoplastic nylon or polycarbonate wallplates

Design features

- Rugged construction reduces installation cost due to less plate breakage and resists bowing to provide a smooth, flat installation
- Exclusive time-saving screw-catch feature holds mounting screws captive and simplifies installation
- High gloss finish is soil resistant
- Polycarbonate wallplates are virtually unbreakable with high structural rigidity, long-term form retention, plus superior impact and abrasion resistance

- Nylon wallplates have a flush-fitting, warp resistant design
- Matching mounting screws provided

Testing & code compliance

- cULus listed to UL514C, file no. E33216, certified to CSA C22.2, no. 42.1

Material characteristics

- Flammability: meets UL94 requirements; 5V rated
- Temperature rating: -40°C to 70°C (-40°F to 158°F)



Thermoset wallplates

Design features

- Extensive line of non-flammable thermoset plates provides flush-fitting, warp resistant performance
- Matching mounting screws provided

Material characteristics

- Flammability: Meets UL94 requirements; 5V rated
- Temperature rating: -40°C to 65°C (-40°F to 149°F)

Testing & code compliance

- cULus listed to UL514C, file no. E33216, certified to CSA C22.2, no. 42.1



302/304 Stainless steel wallplates

Design features

- Superior non-corrosive and non-magnetic properties for applications needing protection from those elements
- Stainless steel alloy contains 18% chromium and 8% nickel for corrosion resistance
- Stamped from 0.032" (0.81mm) thick material
- Horizontally satin-brushed surface finish resists finger prints
- All plates are coated with clear, removable PVC to safeguard the surface during handling and installation

- Matching stainless steel mounting screws provided

Testing & code compliance

- Listed to UL514D, file no. E92122, certified to CSA C22.2, no.42.1

Material characteristics

- Temperature rating: -40°C to 70°C (-40°F to 158°F)



Brass wallplates

Design features

- Line of handsomely crafted, elegant solid brass designs in 11 popular NEMA standard size configurations
- Strong, corrosion resistant and coated with transparent lacquer to resist premature oxidation
- Horizontally satin-brushed surface finish resists fingerprints
- Matching brass-plated steel screws resist damage during installation

- All plates are coated with clear, removable PVC to safeguard the surface during handling and installation
- Solid brass material is a 70/30 alloy (#26C), .040" (1.02mm) thick

Testing & code compliance

- Listed to UL514D, file no. E92003

Material characteristics

- Temperature rating: -40°C to 70°C (-40°F to 158°F)

Compliances, specifications and availability are subject to change without notice.


Standard size toggle switch wallplates

Product description


1-Gang, 2-Gang, 3-Gang, 4-Gang, 5-Gang, 6-Gang




1-Gang




2-Gang




3-Gang



4-Gang




5-Gang



6-Gang


Toggle switch wallplates

Gang	Material	Color suffix	Catalog no.	
1-Gang	Nylon	B, BK, GY, LA, RD, V, W	□ 5134__	•
	Thermoset	B, LA, V, W	□ 2134__	•
	302/304 Stainless steel	—	□ 93071	
	Brass	—	□ 94071	•
2-Gang	Nylon	B, GY, LA, RD, V, W	□ 5139__	•
	Thermoset	B, LA, V, W	□ 2139__	•
	302/304 Stainless steel	—	□ 93072	
	Brass	—	□ 94072	•
3-Gang	Nylon	B, BK, GY, LA, V, W	□ 5141__	•
	Thermoset	B, LA, V, W	□ 2141__	•
	302/304 Stainless steel	—	□ 93073	
	Brass	—	□ 94073	•
4-Gang	Nylon	B, BK, GY, LA, V, W	□ 5154__	•
	Thermoset	B, LA, V, W	□ 2154__	•
	302/304 Stainless steel	—	□ 93074	
5-Gang	Thermoset	B, LA, V, W	□ 2155__	•
	302/304 Stainless steel	—	□ 93075	
6-Gang	Thermoset	B, V, W	□ 2156__	•
	302/304 Stainless steel	—	□ 93076	

Stainless steel wallplates made in China.

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: B (Brown), BK (Black), GY (Gray), LA (Light Almond), RD (Red), V (Ivory), W (White)

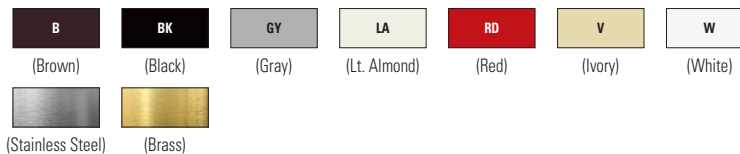

Certification information: 2000, 4000, 5000, ST & PJ series wallplates are cULus Listed; 93000 series wallplates are UL Listed and CSA Certified; 94000 series are UL Listed and CSA certified. **Specification information:** P-40

Compliances, specifications and availability are subject to change without notice.




Indicates USMCA compliant - Page Q-41


Standard size duplex receptacle wallplates

Product description


1-Gang, 2-Gang, 3-Gang




1-Gang



2-Gang




3-Gang



1-Gang

Duplex receptacle

Gang	Material	Color suffix	Catalog no.	
1-Gang	Nylon	B, BK, GY, LA, RD, V, W	□ 5132__	•
	Thermoset	B, LA, V, W	□ 2132__	•
	302/304 Stainless steel	—	□ 93101	
	Brass	—	□ 94101	•
2-Gang	Nylon	B, BK, GY, LA, RD, V, W	□ 5150__	•
	Thermoset	B, LA, V, W	□ 2150__	•
	302/304 Stainless steel	—	□ 93102	
	Brass	—	□ 94102	•
3-Gang	302/304 Stainless steel	—	□ 93103	


Stainless steel wallplates made in China.

Standard size single receptacle wallplates

Product description

1-Gang


Single receptacle

Gang	Material	Color suffix	Catalog no.	
1-Gang with 1.406" (35.712mm) hole	Nylon	B, BK, GY, RD, V, W	□ 5131__	•
	Thermoset	B, LA, V, W	□ 2131__	•
	302/304 Stainless steel	—	□ 93091	
	Brass	—	□ 94091	•

Stainless steel wallplates made in China.

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: B (Brown), BK (Black), GY (Gray), LA (Light Almond), RD (Red), V (Ivory), W (White)

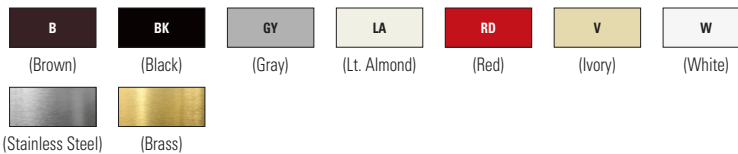

Certification information: 2000, 4000, 5000, ST & PJ series wallplates are cULus Listed; 93000 series wallplates are UL Listed and CSA Certified; 94000 series are UL Listed and CSA certified. **Specification information:** P-40


Compliances, specifications and availability are subject to change without notice.

 Indicates USMCA compliant - Page Q-41


Standard size decorator wallplates

Product description


1-Gang, 2-Gang, 3-Gang, 4-Gang, 5-Gang, 6-Gang




1-Gang




2-Gang




3-Gang



4-Gang




5-Gang



6-Gang


Decorator wallplates

Gang	Material	Color suffix	Catalog no.	
1-Gang	Nylon	B, BK, BL, GY, LA, RD, V, W	□ 5151__	•
	Thermoset	B, BK, GY, LA, V, W	□ 2151__	•
	302/304 Stainless steel	—	□ 93401	
	Brass	—	□ 94401	•
2-Gang	Nylon	B, BK, GY, LA, V, W	□ 5152__	•
	Thermoset	B, BK, GY, LA, V, W	□ 2152__	•
	302/304 Stainless steel	—	□ 93402	
	Brass	—	□ 94402	•
3-Gang	Thermoset	B, GY, LA, V, W	□ 2163__	•
	302/304 Stainless steel	—	□ 93403	
4-Gang	Thermoset	B, LA, V, W	□ 2164__	•
	302/304 Stainless steel	—	□ 93404	
5-Gang	Thermoset	B, LA, V, W	□ 2165__	•
	302/304 Stainless steel	—	□ 93405	
6-Gang	Thermoset	B, LA, V, W	□ 2166__	•
	302/304 Stainless steel	—	□ 93406	

Stainless steel wallplates made in China.

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: B (Brown), BK (Black), BL (Blue), GY (Gray), LA (Light Almond), RD (Red), V (Ivory), W (White)

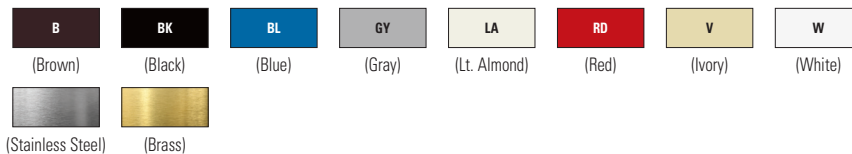

Certification information: 2000, 4000, 5000, ST & PJ series wallplates are cULus Listed; 93000 series wallplates are UL Listed and CSA Certified; 94000 series are UL Listed and CSA certified. **Specification information:** P-40

Compliances, specifications and availability are subject to change without notice.




Indicates USMCA compliant - Page Q-41


Standard size blank wallplates

Product description


1-Gang, 2-Gang, 3-Gang, 4-Gang




1-Gang




2-Gang



3-Gang



4-Gang



93630



93631

Blank - box mounted

Gang	Material	Color suffix	Catalog no.	
1-Gang	Nylon	B, BK, GY, LA, V, W	<input type="checkbox"/> 5129__	•
	Thermoset	B, LA, V, W	<input type="checkbox"/> 2129__	•
	302/304 Stainless steel	—	<input type="checkbox"/> 93151	
	Brass	—	<input type="checkbox"/> 94151	•
2-Gang	Nylon	B, BK, GY, LA, V, W	<input type="checkbox"/> 5137__	•
	Thermoset	B, LA, V, W	<input type="checkbox"/> 2137__	•
	302/304 Stainless steel	—	<input type="checkbox"/> 93152	
3-Gang	302/304 Stainless steel	—	<input type="checkbox"/> 93153	
4-Gang	302/304 Stainless steel	—	<input type="checkbox"/> 93154	

Stainless steel wallplates made in China.

Standard size louver

Product description

Horizontal & vertical

Louwer

Description	Material	Catalog no.	
Horizontal	302/304 Stainless steel	<input type="checkbox"/> 93630	
Vertical	302/304 Stainless steel	<input type="checkbox"/> 93631	

Stainless steel wallplates made in China.

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: B (Brown), BK (Black), GY (Gray), LA (Light Almond), V (Ivory), W (White)



Certification information: 2000, 4000, 5000, ST & PJ series wallplates are cULus Listed; 93000 series wallplates are UL Listed and CSA Certified; 94000 series wallplates are UL Listed and CSA certified. **Specification information:** P-40


Compliances, specifications and availability are subject to change without notice.

 Indicates USMCA compliant - Page Q-41


Standard size combination wallplates

Product description


1-Gang, 2-Gang, 3-Gang, 4-Gang




1-Gang,
0.375" hole




1-Gang,
0.625" hole




2-Gang, toggle
& single receptacle




2-Gang, toggle
& duplex receptacle




2-Gang, toggle
& decorator




2-Gang, toggle
& blank




2-Gang, duplex
receptacle & blank



2-Gang, duplex
receptacle & decorator




3-Gang, 2 toggles
& duplex receptacle




3-Gang, 2 toggles
& decorator

Telephone & coax

Description	Material	Color suffix	Catalog no.	
1-Gang with 0.375" (9.525mm) hole	Nylon	B, GY, V, W	□ 5128__	•
	Thermoset	B, LA, V, W	□ 2128__	•
	302/304 Stainless steel	—	□ 93696	
1-Gang with 0.625" (15.875mm) hole	Nylon	B, GY, V, W	□ 5159__	•
	Thermoset	V, W	□ 2159__	•
	302/304 Stainless steel	—	□ 93591	


Stainless steel wallplates made in China.

Combination 2-gang

Description	Material	Color suffix	Catalog no.	
Toggle & single receptacle	302/304 Stainless steel	—	□ 93512	
Toggle & duplex receptacle	Nylon	B, BK, GY, LA, V, W	□ 5138__	•
	Thermoset	B, LA, V, W	□ 2138__	•
	302/304 Stainless steel	—	□ 93532	
Toggle & decorator	Nylon	B, BK, GY, LA, V, W	□ 5153__	•
	Thermoset	B, LA, V, W	□ 2153__	•
	302/304 Stainless steel	—	□ 93432	
Toggle & blank	Nylon	B, BK, LA, V	□ 5171__	•
	Thermoset	B, LA, V, W	□ 2157__	•
Duplex receptacle & blank	Nylon	B, BK, LA, V	□ 5170__	•
Duplex receptacle & decorator	Thermoset	LA, V, W	□ 2157__	•

Stainless steel wallplates made in China.

Combination 3-gang

Description	Material	Color suffix	Catalog no.	
2 Toggles & duplex receptacle	Nylon	B, GY, V, W	□ 5158__	•
	Thermoset	B, LA, V, W	□ 2158__	•
	302/304 Stainless steel	—	□ 93543	
2 Toggles & decorator	Thermoset	LA, V, W	□ 2173__	•
	302/304 Stainless steel	—	□ 93443	

Stainless steel wallplates made in China.


Combination 4-gang

Description	Material	Color suffix	Catalog no.	
3 Toggles & duplex receptacle	Thermoset	LA, V, W	□ 2174__	•
	302/304 Stainless steel	—	□ 93554	

Stainless steel wallplates made in China.

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: B (Brown), BK (Black), GY (Gray), LA (Light Almond), V (Ivory), W (White)



Certification information: 2000, 4000, 5000, ST & PJ series wallplates are cULus Listed; 93000 series wallplates are UL Listed and CSA Certified; 94000 series wallplates are UL Listed and CSA certified. **Specification information:** P-40


Compliances, specifications and availability are subject to change without notice.

 Indicates USMCA compliant - Page Q-41


Standard size power outlet wallplates

Product description


1-Gang, 2-Gang




93111




93221




192



93223, 69




2168, 93227, 68



93228

Power outlet

Description	Material	Color suffix	Catalog no.	
1-Gang with 1.59" (40.5mm) hole	302/304 Stainless steel	—	□ 93111	
1-Gang with 2.15" (54.8mm) hole	302/304 Stainless steel	—	□ 93221	
	Chrome (UL)	—	□ 39CH*	•
2-Gang with 2.15" (54.7mm) hole	Thermoset	B, LA, V, W	□ 2168__	•
	302/304 Stainless steel	—	□ 93227	
	Chrome (UL)	—	□ 68*	•
2-Gang with 2.15" (54.7mm) Off center hole	Chrome (UL)	—	□ 192*	•
2-Gang with 2.28" (57.9mm) hole	302/304 Stainless steel	—	□ 93228	
2-Gang with 2.47" (62.7mm) hole	302/304 Stainless steel	—	□ 93223	
	Chrome (UL)	—	□ 69*	•
2-Gang with 2.47" (62.7mm) hole	Nylon	V, W	□ 5169__	•

* UL Listed

Stainless steel wallplates made in China.

Standard size wallplate guide for power devices

Wallplates for power devices

Power device catalog no.	Wallplate catalog no.
32B, 38B, 1233, 1234, 1253, 1254, 1257, 1258, 1263, 5759 5700N, 5709N, 5716N, 5795N, 7985N	39CH, 68, 2168, 93221, 93227
5515N, 5744N, 5754N, 8430N, 8450N, 8460N, 9460N	69, 5169, 93223
122B	192

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: B (Brown), LA (Light Almond), V (Ivory), W (White)



Certification information: 2000, 4000, 5000, ST & PJ series wallplates are cULus Listed; 93000 series wallplates are UL Listed and CSA Certified; 94000 series wallplates are UL Listed and CSA certified. **Specification information:** P-40

Compliances, specifications and availability are subject to change without notice.

 Indicates USMCA compliant - Page Q-41

Standard size extra depth wallplates


Product description

1-Gang, 2-Gang, 3-Gang


Extra depth*

Description	Material	Color suffix	Catalog no.	
1-Gang toggle	Thermoset	V, W	□ 4134__	•
2-Gang toggle	Thermoset	V, W	□ 4139__	•
1-Gang duplex receptacle	Thermoset	V, W	□ 4132__	•
2-Gang duplex receptacle	Thermoset	V, W	□ 4150__	•
2-Gang blank	Thermoset	V, W	□ 4137__	•
2-Gang toggle & duplex receptacle	Thermoset	V, W	□ 4138__	•
2-Gang toggle & blank	Thermoset	V, W	□ 4171__	•
2-Gang duplex receptacle & blank	Thermoset	V, W	□ 4170__	•


*Extra depth wallplates are approximately 10% deeper than standard size/standard depth counterparts




1-Gang toggle




1-Gang duplex receptacle




2-Gang toggle




2-Gang duplex receptacle




2-Gang blank




2-Gang toggle & duplex receptacle




2-Gang toggle & blank




2-Gang duplex receptacle & blank




EG5134, EM93071




IG5132



EM5132, EM93101



IG5131



EM93102

Standard size pre-marked special use wallplates

Product description

1-Gang, 2-Gang


Pre-marked special use*

Description	Material	Color suffix	Catalog no.	
1-Gang toggle "emergency"	Nylon	RD	□ EM5134	•
	302/304 Stainless steel	—	□ EM93071	
1-Gang duplex receptacle "isolated ground"	Nylon	RN	□ IG5132	•
1-Gang duplex receptacle "emergency"	Nylon	RD	□ EM5132	•
	302/304 Stainless steel	—	□ EM93101	
1-Gang single receptacle with 1.40" (35.7mm) hole "isolated ground"	Nylon	V, RN	□ IG5131__	•
2-Gang duplex receptacle "emergency"	302/304 Stainless steel	—	□ EM93102	
Stainless steel wallplate for Corbin locking switches with "ON-OFF" indicator engraving	302 Stainless steel	—	□ AH1187	
Stainless steel wallplate for Corbin locking switches	302 Stainless steel	—	□ AH1188	

Stainless steel wallplates made in China.

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: RD (Red), RN (Orange), V (Ivory), W (White)



Certification information: 2000, 4000, 5000, ST & PJ series wallplates are cULus Listed; 93000 series wallplates are UL Listed and CSA Certified; 94000 series wallplates UL Listed and CSA certified. **Specification information:** P-40


Compliances, specifications and availability are subject to change without notice.

Indicates USMCA compliant - Page Q-41


Mid-size toggle switch wallplates

Product description


1-Gang, 2-Gang, 3-Gang, 4-Gang, 5-Gang, 6-Gang




1-Gang




2-Gang




3-Gang




4-Gang




5-Gang




6-Gang



1-Gang




2-Gang



1-Gang

Toggle switch

Gang	Material	Color suffix	Catalog no.	
1-Gang	Polycarbonate	B, BK, GY, LA, RD, V, W	<input type="checkbox"/> PJ1__	
	Thermoset	B, LA, V, W	<input type="checkbox"/> 2034__	•
	302/304 Stainless steel	—	<input type="checkbox"/> 93971	
2-Gang	Polycarbonate	B, BK, GY, LA, RD, V, W	<input type="checkbox"/> PJ2__	
	Thermoset	B, LA, V, W	<input type="checkbox"/> 2039__	•
	302/ 304 Stainless steel	—	<input type="checkbox"/> 93972	
3-Gang	Polycarbonate	B, BK, GY, LA, RD, V, W	<input type="checkbox"/> PJ3__	
	Thermoset	B, LA, V, W	<input type="checkbox"/> 2041__	•
	302/304 Stainless steel	—	<input type="checkbox"/> 93973	
4-Gang	Polycarbonate	B, BK, GY, LA, V, W	<input type="checkbox"/> PJ4__	
	Thermoset	LA, V, W	<input type="checkbox"/> 2054__	•
5-Gang	Polycarbonate	B, BK, GY, LA, V, W	<input type="checkbox"/> PJ5__	
6-Gang	Polycarbonate	B, BK, GY, LA, V, W	<input type="checkbox"/> PJ6__	


Stainless steel wallplates made in China.

Mid-size duplex & single receptacle wallplates

Product description

1-Gang, 2-Gang

Duplex receptacle

Gang	Material	Color suffix	Catalog no.	
1-Gang	Polycarbonate	B, BK, BL, GY, LA, RD, V, W	<input type="checkbox"/> PJ8__	
	Thermoset	B, LA, V, W	<input type="checkbox"/> 2032__	•
	302/304 Stainless steel	—	<input type="checkbox"/> 93901	
2-Gang	Polycarbonate	B, BK, GY, LA, RD, V, W	<input type="checkbox"/> PJ82__	
	Thermoset	LA, V, W	<input type="checkbox"/> 2050__	•
	302/304 Stainless steel	—	<input type="checkbox"/> 93902	

Stainless steel wallplates made in China.

Single receptacle

Gang	Material	Color suffix	Catalog no.	
1-Gang with 1.406" (35.712mm) hole	Thermoset	B, LA, V, W	<input type="checkbox"/> 2031__	•
	302/304 Stainless steel	—	<input type="checkbox"/> 93991	

Stainless steel wallplates made in China.

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: B (Brown), BK (Black), BL (Blue), GY (Gray), LA (Light Almond), RD (Red), V (Ivory), W (White)



Certification information: 2000, 4000, 5000, ST & PJ series wallplates are cULus Listed; 93000 series wallplates are UL Listed and CSA Certified; 94000 series wallplates are UL Listed and CSA certified. **Specification information:** P-40

Compliances, specifications and availability are subject to change without notice.




Indicates USMCA compliant - Page Q-41

Mid-size decorator wallplates


Product description

1-Gang, 2-Gang, 3-Gang, 4-Gang, 5-Gang, 6-Gang


Decorator wallplates

Gang	Material	Color suffix	Catalog no.	
1-Gang	Polycarbonate	B, BK, BL, GY, LA, RD, V, W	<input type="checkbox"/> PJ26__	
	Thermoset	B, LA, V, W	<input type="checkbox"/> 2051__	•
	302/304 Stainless steel	—	<input type="checkbox"/> 93934	
2-Gang	Polycarbonate	B, BK, GY, LA, RD, V, W	<input type="checkbox"/> PJ262__	
	Thermoset	LA, V, W	<input type="checkbox"/> 2052__	•
	302/304 Stainless steel	—	<input type="checkbox"/> 93935	
3-Gang	Polycarbonate	B, BK, GY, LA, V, W	<input type="checkbox"/> PJ263__	
	Thermoset	LA, V, W	<input type="checkbox"/> 2063__	•
	302/304 Stainless steel	—	<input type="checkbox"/> 93936	
4-Gang	Polycarbonate	B, BK, GY, LA, V, W	<input type="checkbox"/> PJ264__	
	Thermoset	LA, V, W	<input type="checkbox"/> 2064__	•
5-Gang	Polycarbonate	B, BK, GY, LA, V, W	<input type="checkbox"/> PJ265__	
6-Gang	Polycarbonate	B, BK, GY, LA, V, W	<input type="checkbox"/> PJ266__	


Stainless steel wallplates made in China.




1-Gang




2-Gang




3-Gang



4-Gang



5-Gang



6-Gang

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: B (Brown), BK (Black), BL (Blue), GY (Gray), LA (Light Almond), RD (Red), V (Ivory), W (White)



Certification information: 2000, 4000, 5000, ST & PJ series wallplates are cULus Listed; 93000 series wallplates are UL Listed and CSA Certified; 94000 series wallplates are UL Listed and CSA certified. **Specification information:** P-40

Compliances, specifications and availability are subject to change without notice.












Indicates USMCA compliant - Page Q-41

Mid-size screwless wallplates

Product description

1-Gang, 2-Gang, 3-Gang, 4-Gang, 5-Gang, 6-Gang



Decorator wallplates

Description	Material	Color suffix	Catalog no.
1-Gang	Polycarbonate	B, BB, BK, GY, LA, V, W	<input type="checkbox"/> PJS26__
2-Gang	Polycarbonate	B, BB, BK, LA, V, W	<input type="checkbox"/> PJS262__
3-Gang	Polycarbonate	BB, BK, LA, V, W	<input type="checkbox"/> PJS263__
4-Gang	Polycarbonate	BK, LA, V, W	<input type="checkbox"/> PJS264__
5-Gang	Polycarbonate	BK, LA, V, W	<input type="checkbox"/> PJS265__
6-Gang	Polycarbonate	BK, LA, V, W	<input type="checkbox"/> PJS266__

Toggle wallplates


Description	Material	Color suffix	Catalog no.
1-Gang	Polycarbonate	B, BB, BK, LA, V, W	<input type="checkbox"/> PJS1__
2-Gang	Polycarbonate	B, BB, BK, LA, V, W	<input type="checkbox"/> PJS2__
3-Gang	Polycarbonate	LA, V, W	<input type="checkbox"/> PJS3__
4-Gang	Polycarbonate	LA, V, W	<input type="checkbox"/> PJS4__

Duplex receptacle wallplates

Description	Material	Color suffix	Catalog no.
1-Gang	Polycarbonate	B, BB, BK, LA, V, W	<input type="checkbox"/> PJS8__

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: B (Brown), BB (Brushed Bronze), BK (Black), GY (Gray), LA (Light Almond), V (Ivory), W (White)



Certification information: Aspire series wallplates are cULus Listed to UL5154D, file no. E33216; ; PJ series wallplates are cULus Listed.


Specification information: P-40

Compliances, specifications and availability are subject to change without notice.


Mid-size blank wallplates

Product description


1-Gang box, 1-Gang strap, 2-Gang box




1-Gang



2-Gang







1-Gang with 0.375" hole



1-Gang with 0.406" hole, box mounted

Blank - box & strap mounted



Description	Material	Color suffix	Catalog no.	
1-Gang box	Polycarbonate	B, BK, GY, LA, V, W	<input type="checkbox"/> PJ13__	
	Thermoset	B, LA, V, W	<input type="checkbox"/> 2029__	
	302/304 Stainless steel	—	<input type="checkbox"/> 93951	
1-Gang strap	Polycarbonate	B, BK, LA, V, W	<input type="checkbox"/> PJ14__	
2-Gang box	Polycarbonate	B, BK, GY, LA, V, W	<input type="checkbox"/> PJ23__	
	Thermoset	LA, V, W	<input type="checkbox"/> 2037__	

Stainless steel wallplates made in China.




Mid-size telephone & coax wallplates

Product description

1-Gang box

Telephone & coax



Description	Material	Color suffix	Catalog no.	
1-Gang with 0.37" (9.5mm) hole	Thermoset	V, W	<input type="checkbox"/> 2028__	
	302/304 Stainless steel	—	<input type="checkbox"/> 93996	
1-Gang with 0.40" (10.3mm) hole, box mounted	Polycarbonate	B, BK, LA, V, W	<input type="checkbox"/> PJ11__	

Stainless steel wallplates made in China.

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: B (Brown), BK (Black), GY (Gray), LA (Light Almond), V (Ivory), W (White)



Certification information: 2000, 4000, 5000, ST & PJ series wallplates are cULus Listed; 93000 series wallplates are UL Listed and CSA Certified; 94000 series wallplates are UL Listed and CSA certified. **Specification information:** P-40

Compliances, specifications and availability are subject to change without notice.




Indicates USMCA compliant - Page Q-41


Mid-size combination wallplates

Product description


2-Gang, 3-Gang




2-Gang toggle & duplex receptacle




2-Gang, toggle & decorator




2-Gang toggle & blank




2-Gang duplex receptacle & blank




2-Gang, duplex receptacle & decorator




3-Gang, 2 toggles & duplex receptacle




3-Gang, 2 toggles & decorator




1-Gang 1.406" hole



1-Gang 1.594" hole



1-Gang with 2.1563" hole



2-Gang with 2.1563" hole

Combination 2-gang

Description	Material	Color suffix	Catalog no.
Toggle & duplex receptacle	Polycarbonate	B, BK, GY, LA, RD, V, W	□PJ18__
	Thermoset	B, LA, V, W	□2038__
	302/304 Stainless steel	—	□93932
Toggle & decorator	Polycarbonate	B, BK, GY, LA, V, W	□PJ126__
	Thermoset	LA, V, W	□2053__
	302/304 Stainless steel	—	□93937
Toggle & blank	Polycarbonate	B, LA, V, W	□PJ113__
Duplex receptacle & blank	Polycarbonate	B, BK, GY, LA, RD, V, W	□PJ138__
Duplex receptacle & decorator	Polycarbonate	B, BK, GY, LA, RD, V, W	□PJ826__

Stainless steel wallplates made in China.

Combination 3-gang

Description	Material	Color suffix	Catalog no.
2 Toggles & duplex receptacle	Polycarbonate	B, BK, GY, LA, RD, V, W	□PJ28__
2 Toggles & decorator	Polycarbonate	B, BK, GY, LA, V, W	□PJ226__

Stainless steel wallplates made in China.

Mid-size power outlet wallplates

Product description

1-Gang, 2-Gang

Power outlet

Description	Material	Color suffix	Catalog no.
1-Gang with 1.40" (35.7mm) hole	Polycarbonate	B, BK, GY, LA, RD, V, W	□PJ7__
1-Gang with 1.59" (40.5mm) hole	Polycarbonate	B, GY, V, W	□PJ720__
1-Gang with 2.15" (54.7mm) hole	Polycarbonate	B, BK, V, W	□PJ724__
	Nylon	V	□5068__
	Thermoset	B, V, W	□2068__
2-Gang with 2.15" (54.7mm) hole	Polycarbonate	B, V, W	□PJ703__


Mid-size wallplate guide for power devices

Wallplate for power devices

Power device catalog no.	Wallplate catalog no.
32B, 38B, 1233, 1234, 1253, 1254, 1257, 1258, 1263, 5700N, 5709N, 5716N, 5795N, 7985N	2068, 5068, PJ724, PJ703

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: B (Brown), BK (Black), GY (Gray), LA (Light Almond), RD (Red), V (Ivory), W (White)



Certification information: 2000, 4000, 5000, ST & PJ series wallplates are cULus Listed; 93000 series wallplates are UL Listed and CSA Certified; 94000 series wallplates are UL Listed and CSA certified. **Specification information:** P-40

Compliances, specifications and availability are subject to change without notice.









Indicates USMCA compliant - Page Q-41

Mid-size sectional wallplates

Product description

1-Gang

Sectional wallplates



Description	Material	Location	Color	Catalog no.
1-Gang toggle	Polycarbonate	Center	W	<input type="checkbox"/> STC1W
		End	W	<input type="checkbox"/> STE1W
1-Gang decorator	Polycarbonate	Center	W	<input type="checkbox"/> STC26W
		End	W	<input type="checkbox"/> STE26W
1-Gang duplex receptacle	Polycarbonate	Center	W	<input type="checkbox"/> STC8W
		End	W	<input type="checkbox"/> STE8W
1-Gang blank	Polycarbonate	Center	W	<input type="checkbox"/> STC14W
		End	W	<input type="checkbox"/> STE14W
1-Gang single receptacle 1.40" (35.7mm) hole	Polycarbonate	Center	W	<input type="checkbox"/> STC7W
		End	W	<input type="checkbox"/> STE7W

Mid-size pre-marked special use wallplates

Product description

1-Gang, 2-Gang

Pre-marked special use

Description	Material	Color suffix	Catalog no.
1-Gang toggle "emergency"	Polycarbonate	RD	<input type="checkbox"/> PJ1EM
1-Gang decorator "emergency"	Polycarbonate	RD	<input type="checkbox"/> PJ26EM
1-Gang orange decorator "isolated ground"	Polycarbonate	RN	<input type="checkbox"/> PJ26IG
1-Gang orange single receptacle, 1.40" (35.7mm) hole "isolated ground"	Polycarbonate	RN	<input type="checkbox"/> PJ7IG
1-Gang duplex receptacle "computer"	Polycarbonate	V, W	<input type="checkbox"/> PJ8CO__
1-Gang duplex receptacle "emergency"	Polycarbonate	RD	<input type="checkbox"/> PJ8EM
1-Gang duplex receptacle "GFCI protected"	Polycarbonate	V, W	<input type="checkbox"/> PJ8GF__
1-Gang orange duplex receptacle "isolated ground"	Polycarbonate	RN	<input type="checkbox"/> PJ8IG
2-Gang toggle "emergency"	Polycarbonate	RD	<input type="checkbox"/> PJ2EM
2-Gang duplex receptacle "emergency"	Polycarbonate	RD	<input type="checkbox"/> PJ82EM

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: RD (Red), RN (Orange), V (Ivory), W (White)




Certification information: 2000, 4000, 5000, ST & PJ series wallplates are cULus Listed; 93000 series wallplates are UL Listed and CSA Certified; 94000 series wallplates are UL Listed and CSA certified. **Specification information:** P-40
Compliances, specifications and availability are subject to change without notice.


Oversize toggle switch wallplates

Product description


1-Gang, 2-Gang, 3-Gang, 4-Gang




1-Gang toggle




2-Gang toggle




3-Gang




4-Gang




1-Gang



1-Gang




2-Gang



1-Gang 1.406" hole

Toggle switch

Description	Material	Color suffix	Catalog no.	
1-Gang	Thermoset	B, LA, V, W	□ 2144__	•
	302/304 Stainless steel	—	□ 93871	
2-Gang	Thermoset	B, LA, V, W	□ 2149__	•
	302/304 Stainless steel	—	□ 93872	
3-Gang	Thermoset	V, W	□ 2741__	•
	302/304 Stainless steel	—	□ 93873	
4-Gang	302/304 Stainless steel	—	□ 93874	

Stainless steel wallplates made in China.

Oversize decorator receptacle wallplates

Product description

1-Gang

Decorator

Description	Material	Color suffix	Catalog no.	
1-Gang	Thermoset	V, W	□ 2751__	•
	302/304 Stainless steel	—	□ 93834	


Stainless steel wallplates made in China.

Oversize duplex receptacle wallplates

Product description

1-Gang, 2-Gang

Duplex receptacle

Description	Material	Color suffix	Catalog no.	
1-Gang	Thermoset	B, LA, V, W	□ 2142__	•
	302/304 Stainless steel	—	□ 93801	
2-Gang	Thermoset	V, W	□ 2750__	•
	302/304 Stainless steel	—	□ 93802	

Stainless steel wallplates made in China.

Oversize single receptacle wallplates

Product description

1-Gang


Single receptacle

Description	Material	Color suffix	Catalog no.	
1-Gang with 1.40" (35.7mm) hole	Thermoset	V, W	□ 2731__	•
	302/304 Stainless steel	—	□ 93891	

Stainless steel wallplates made in China.

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: B (Brown), LA (Light Almond), V (Ivory), W (White)



Certification information: 2000, 4000, 5000, ST & PJ series wallplates are cULus Listed; 93000 series wallplates are UL Listed and CSA Certified; 94000 series wallplates are UL Listed and CSA certified. **Specification information:** P-40

Compliances, specifications and availability are subject to change without notice.

 Indicates USMCA compliant - Page Q-41


Oversize blank box mounted wallplates

Product description


1-Gang, 2-Gang




1-Gang



2-Gang




2-Gang toggle & duplex receptacle



1-Gang with 0.375" hole

Blank - box mounted

Description	Material	Color suffix	Catalog no.	
1-Gang	Thermoset	V, W	□ 2729__	•
	302/304 Stainless steel	—	□ 93851	
2-Gang	302/304 Stainless steel	—	□ 93852	

Stainless steel wallplates made in China.

Oversize combination wallplates

Product description

2-Gang

Combination 2-gang


Description	Material	Color suffix	Catalog no.	
Toggle & duplex receptacle	Thermoset	B, V, W	□ 2148__	•

Oversize telephone & coax wallplates

Product description

2-Gang

Telephone & coax

Description	Material	Color suffix	Catalog no.	
1-Gang with 0.37" (9.5mm) hole	Thermoset	V, W	□ 2728__	•
	302/304 Stainless steel	—	□ 93896	

Stainless steel wallplates made in China.

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: B (Brown), V (Ivory), W (White)




Certification information: 2000, 4000, 5000, ST & PJ series wallplates are cULus Listed; 93000 series wallplates are UL Listed and CSA Certified; 94000 series wallplates are UL Listed and CSA certified. **Specification information:** P-40
Compliances, specifications and availability are subject to change without notice.

 Indicates USMCA compliant - Page Q-41

Wallplate accessories

Product description

GFCI extension ring, adapters, wallplate screws, blank insert & pilot light lamp holder



GFER




2160



231




756



153

Wallplate accessories

Description	Material	Color suffix	Catalog no.	
GFCI extension ring for use with GFCIs, 7/8" spacer, cULus Certified	Polypropylene	B, BLK, LA, V, W	<input type="checkbox"/> GFER__	
Adapter—decorator to blank	Polypropylene	B, LA, V, W	<input type="checkbox"/> 2160__ ^Δ	•
Adapter—decorator to toggle	Polypropylene	V, W	<input type="checkbox"/> 2161__ ^Δ	•
Toggle & receptacle wallplate screws #6-32 x 1/2"	Metal, baked enamel head	B, LA, V, W	<input type="checkbox"/> 231__ ^Δ	•
	Nylon	RD, V, W	<input type="checkbox"/> 232__ ^Δ	
Toggle & receptacle wallplate screws #6-32 x 5/16"		LA, V, W	<input type="checkbox"/> 2231__ ^Δ	•

^ΔNot UL listed. GFER: cULus Listed to UL514C, CSA certified to C22.2, no. 18-98

Sub-frame & blank insert

Description	Material	Color suffix	Catalog no.	
Blank insert and strap for any switch plate		B, GY, LA, V, W	<input type="checkbox"/> 756__	•

Louvered wallplate accessories

Description	Material	Color suffix	Catalog no.	
Recessed pilot light lamp holder with 6 watt clear S-6 bulb	Polypropylene		<input type="checkbox"/> 153	•

Listed to UL496, file no. E18522; CSA certified to C22.2, no. 43

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: B (Brown), BLK (Black), LA (Light Almond), RD (Red), V (Ivory), W (White)

B	BLK	LA	RD	V	W
(Brown)	(Black)	(Lt. Almond)	(Red)	(Ivory)	(White)

Compliances, specifications and availability are subject to change without notice.



Indicates USMCA compliant - Page Q-41

LED step lighting

Product description

120V/AC
60Hz

Features

- Fits into a standard junction box for easy installation (single-gang, handy box, 2" minimum inside width)
- 6 LED's with 6000-6500K light temperature
- Energy-efficient 40,000 hour rated LED lamp light
- Back & side wire, #14 - #12 AWG
- Perfect for any area where low level lighting or safe way-finding is needed, such as hallways, stairways, lobbies, auditoriums and theaters
- Includes vertical and horizontal louvered wallplates



7739

LED step light

Rating V/AC	Description	Color	Catalog no.
120, 60Hz	3W LED step light (vertical and horizontal)	LA, W	□ 7739__

Note: dimensional information on P-41


Wi-Fi smart switch

Rating V/AC	Rating		Description	Color	Catalog no.
	Hz				
120	60		3W LED step light (vertical and horizontal)	LA, W	□ 7739__

Note: dimensional information on P-41

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix; LA (Light Almond), W (White)



Material characteristics: Faceplate, Polycarbonate/ABS. Back Body, Polycarbonate. Strap, Galvanized Steel. Wire, #14 - #12 AWG

Specification information: P-41


Compliances, specifications and availability are subject to change without notice.

Wallplate dimensional information


Mounting hole, cover & plate opening dimensions

Mounting holes for wallplates and covers


These are the most common nominal spacings for mounting holes on wallplates and covers. Holes are normally countersunk for oval head #6-32 screws.




Device or strap



Box




Decorator/GFCI




FS box

Cover opening dimensions


Nominal dimensions for cover openings conform to industry standards and practices.



4-wire power device




Off center power device



3-wire power device




Single locking receptacle 20/30 amp




Single receptacle

Plate opening dimensions


Nominal dimensions for plate openings conform to industry standards and practices.

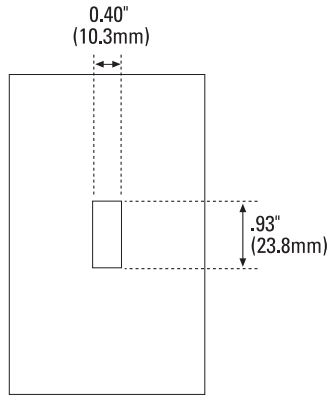

Toggle

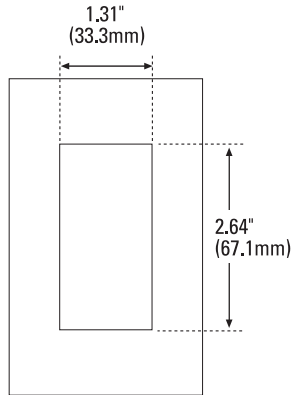

Decorator

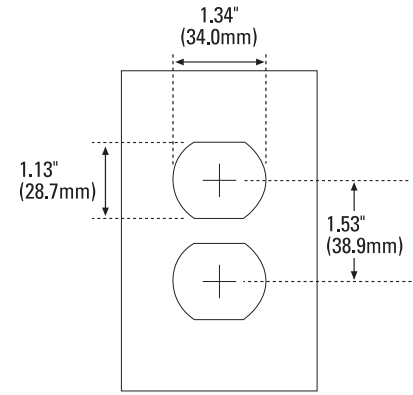


Duplex receptacle

Compliances, specifications and availability are subject to change without notice.


Wallplate sizes

Gang	Description	Height	Width	First gang to edge	Gang to gang
1-Gang	Standard	4.50" (114.3mm)	2.75" (69.8mm)	1.37" (34.9mm)	—
	Mid-size	4.87" (123.8mm)	3.12" (79.4mm)	1.56" (39.7mm)	—
	Oversize	5.25" (133.3mm)	3.50" (88.9mm)	1.75" (44.4mm)	—
2-Gang	Standard	4.50" (114.3mm)	4.56" (115.9mm)	1.37" (34.9mm)	1.81" (46.0mm)
	Mid-size	4.87" (123.8mm)	4.94" (125.4mm)	1.56" (39.7mm)	1.81" (46.0mm)
	Oversize	5.25" (133.3mm)	5.31" (134.9mm)	1.75" (44.4mm)	1.81" (46.0mm)
3-Gang	Standard	4.50" (114.3mm)	6.37" (161.9mm)	1.37" (34.9mm)	1.81" (46.0mm)
	Mid-size	4.87" (123.8mm)	6.75" (171.4mm)	1.56" (39.7mm)	1.81" (46.0mm)
	Oversize	5.25" (133.3mm)	7.17" (182.2mm)	1.75" (44.4mm)	1.81" (46.0mm)
4-Gang	Standard	4.50" (114.3mm)	8.19" (207.9mm)	1.37" (34.9mm)	1.81" (46.0mm)
	Mid-size	4.87" (123.8mm)	8.56" (217.5mm)	1.56" (39.7mm)	1.81" (46.0mm)
	Oversize	5.25" (133.3mm)	8.94" (227.0mm)	1.75" (44.4mm)	1.81" (46.0mm)
5-Gang	Standard	4.50" (114.3mm)	10.00" (254.0mm)	1.37" (34.9mm)	1.81" (46.0mm)
	Mid-size	4.87" (123.8mm)	10.37" (263.5mm)	1.56" (39.7mm)	1.81" (46.0mm)
6-Gang	Standard	4.50" (114.3mm)	11.81" (300.0mm)	1.37" (34.9mm)	1.81" (46.0mm)
	Mid-size	4.87" (123.8mm)	12.18" (309.5mm)	1.56" (39.7mm)	1.81" (46.0mm)


Standard

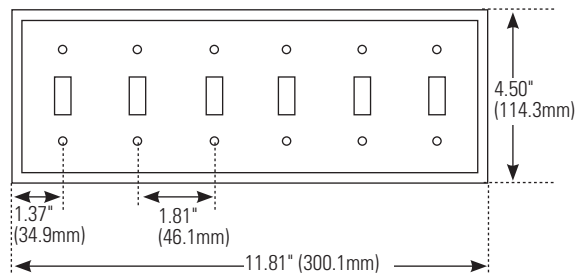


Mid-size

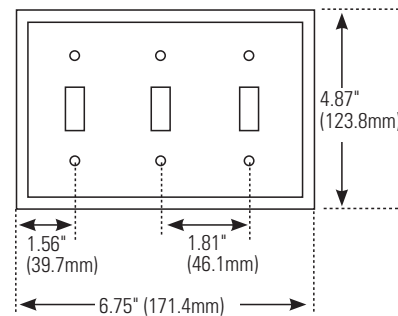

Oversize Mid-size Standard

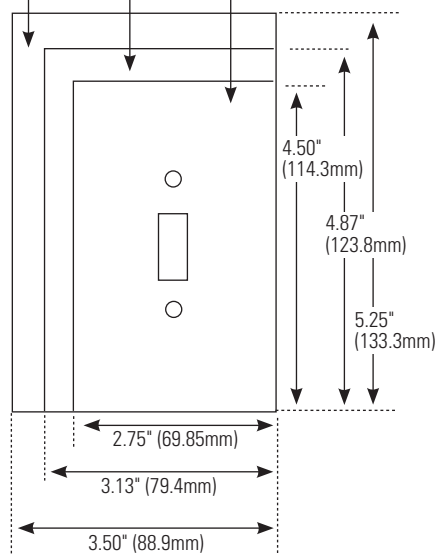

Oversize



Compliances, specifications and availability are subject to change without notice.

Wallplate specification & performance data

Wallplates

Product description

Standard size, mid-size, oversize

Wallplate sizes: standard size, mid-sized & oversize wallplates

	Thermoset	Nylon	Stainless steel	Polycarbonate
Material type	Thermoset	Nylon	Stainless steel	Polycarbonate
Manufacturing process	Injection molded	Injection molded	Stamped	Injection molded
Testing & code compliance	<ul style="list-style-type: none"> cULus Listed to UL 514D, file no. E33216 CSA certified C22.2, no. 42.1, UL file E33216 	<ul style="list-style-type: none"> cULus Listed to UL 514D, file no. E33216 CSA certified C22.2, no. 42.1, UL file E33216 	<ul style="list-style-type: none"> cULus Listed to 514D, file no. E92003 CSA certified to C22.2, no. 42.1 UL file E92003 	<ul style="list-style-type: none"> cULus Listed to UL 514D, file no. E33216 cULus, UL file E33216, CSA certified to C22.2, no. 42.1
Environmental specifications	<p>Flammability: Meets UL94 requirements; 5VA rated</p> <p>Temperature rating: -40°C to 90°C (-40°F to 194°F)</p>	<p>Flammability: Meets UL94 requirements; 5VA rated</p> <p>Temperature rating: -40°C to 70°C (-40°F to 158°F)</p>	<p>Flammability: N/A</p> <p>Temperature rating: -40°C to 70°C (-40°F to 158°F)</p>	<p>Flammability: Meets UL94 requirements; 5VA rated</p> <p>Temperature rating: -40° to 70° C (-40°F to 158°F)</p>
Materials	<p>Body: 0.080" thick thermoset urea or phenolic</p> <p>Inner wallplate: N/A</p>	<p>Body: 0.060" thick thermoplastic</p> <p>Inner wallplate: N/A</p>	<p>Body: 0.032" thick stainless steel alloy, 18% chromium and 8% nickel for corrosion resistance</p> <p>Inner wallplate: N/A</p>	<p>Body: 0.080" thick thermoplastic polycarbonate</p> <p>Inner wallplate: 0.071" thick polycarbonate (PJS Series)</p>

Compliances, specifications and availability are subject to change without notice.



Commercial specification grade LED step light

Product description

120 V/AC 60Hz

Series type	Louvered faceplate 7739 series
Illumination	6 LEDs 18-36 lumens 6000-6500 Kelvin LED life rated 40,000 hours
Power consumption	<3 Watts
Materials	Faceplate: Polycarbonate Bottom Housing: Polycarbonate Strap: Galvanized Steel Termination Accommodations: #14 - #12 AWG
Testing & code compliance	• cULus Listed UL 1958 and UL8750
Power supply	120V/AC, 60Hz
Installation	Single-gang junction box
Environmental	Temperature rating: -35°C -66°C Flammability rating: V-2 Grade

7739

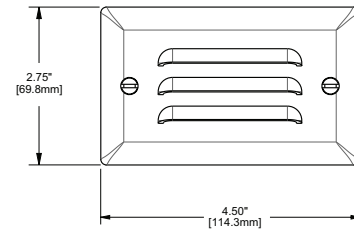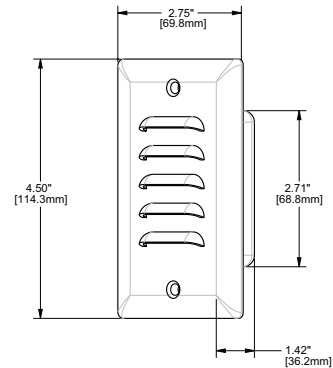

Compliances, specifications and availability are subject to change without notice.